

P20/P20P/P20G

Dual-line business IP Phone

P20 Series enterprise wireless WiFi phone, equipped with 132x64 pixel black and white LCD screen with backlight, providing users with a clear visual experience. And P20 series have 6 speed dial M keys, to achieve a one-click speed dial, easy to operate, and improves call efficiency. P20 series integrates 2.4GHz WiFi, users can choose the adaptable model according to the demand of Gigabit Ethernet port, PoE supply to meet different scenarios of enterprise office. Integrated USB2.0 interface supports USB flash drive, EHS10 adapter, Bluetooth dongle, allowing you to experience rich expansion capabilities. At the same time, P20 series all support 6-way local voice conferencing call, helping you to enhance the efficiency of multi-person collaborative work.



Key Features and Benefits

HD voice, Better calls

Flyingvoice P20 Series supports Opus wideband codec with advanced echo cancellation technology and intelligent noise cancellation technology to provide users with high-definition voice for better quality voice calls.

Convenient Networking, More Comfortable Calls

P20 Series is integrated with 100/1000M dual Ethernet ports, built-in 2.4GHz WiFi, PoE, via the networking characteristics of different models, users can choose machines that adapt to the corporate office environment to meet the needs of different application scenarios.

USB expansion to meet more application scenarios

Integrated USB 2.0 interface, users can choose according to different models, USB flash drive, EHS10 adapter, Bluetooth dongle to access to achieve the USB recording, as well as DECT wireless headset, Bluetooth wireless headset, providing users with wireless office services.

Easy Deployment

P20 Series can be easily to deploy and manage by online platforms such as FACS and FRPS and auto-provisioning modes FTP/TFTP/HTTP/HTTPS/TR069, greatly saving on operation and maintenance costs for IT departments.

- 2.3" 132*64px backlit LCD screen
- 2.4GHz Wi-Fi
- 2 SIP accounts
- Dual Gigabit Ethernet ports (P20G Only)
- USB 2.0 port for USB recording
- Support PoE (P20P/G Only)
- Support DECT and RJ9 headset
- 6-Way Conference call
- Six speed dial M keys (M1-M6)
- Opus
- Wall mountable

Model differentiation

Device	P20	P20P	P22G
POE	Not support	Support	Support
Internet	2*10/100 Mbps	2*10/100 Mbps	2*10/100/1000 Mbps

Phone Features

LCD Screen	> 132×64px backlit B/W LCD screen
Function Keys	> 12 Function Keys: M1, M2, M3, M4, M5, M6, mute, headset, transfer, redial, speakerphone > 2 Line key, 4 Soft Keys, 5 Navigate Keys, Volume+/-
Wi-Fi	> 2.4GHz
SIP Accounts	> 2 SIP accounts
USB Port	> USB call recording through USB flash drive > Wireless Headset Adapter EHS10 > Bluetooth dongle
Ethernet Port	> 2*10/100M (P20G support 1000M) > Support PoE (P20P)
Other Ports	> 1 x Handset port, > 1 x RJ9 Headset port - Wire-controlled RJ9 headset through HP200

Call Features

Basic function	> Call hold, Mute, DND, Redial, Auto answer, One-touch speed dial, Hotline, SMS, Call forward, Call waiting, Call transfer (attended/blind), Paging, Intercom, Voice mail, BLF, Anonymous call, Anonymous call rejection, Message waiting indicator (MWI), Hot desking
Direct IP Call	> Supported
Phone book	> 2000 records; Phonebook search/import/export; XML/LDAP remote phonebook; Black list
Call history	> 60 records; Call history: all/missed/dialed/received
Conference Call	> 6-way conference, Network conference
USB call recording	> support
DECT headset	> support

Audio Features

HD Voice	> HD handset, HD speaker
Audio Codec	> G.722, Opus, AMR-WB(Optional), G.711WB(Optional), G.711(A/U), iLBC, G.729A/B, G.723, G.723.1, G.726, AMR-NB(Optional)
DTMF	> In-band, RFC 2833, SIP info
Other Features	> AEC, VAD, CNG, PLC, AGC, AJB

Network

Network Safety	> SIP Related Features: - SIP v1 (RFC2543), v2 (RFC3261), NAT Traversal by STUN - SIP link mode: Proxy mode and peer-to-peer SIP link mode - Call server redundancy supported > Network Features: - Static IP and DHCP, IPv4 /IPv6, Dual stack IPv4/IPv6, PPPoE, ARP/RARP, DNS A/DNS SRV/DNS NAPTR - LLDP/CDP/DHCP VLAN; IEEE802.1X; OpenVPN; DSCP, 802.1p QoS, SSL, SSH > Time and Date synchronization: SNTP, PBX, DHCP > Transport Feature: UDP/TCP/TLS; RTP/RTCP/SRTP
----------------	---

Configuration & Maintenance

Auto-provision	<ul style="list-style-type: none"> > TR069 (TR104/TR106) > FTP/TFTP/HTTP/HTTPS for Auto Provisioning > Cloud device management: FACS > Cloud device management: FRPS > DHCP Option66
Configuration	<ul style="list-style-type: none"> > Supports web configuration > Factory reset, reboot > Packet capture, system log

Others


Physical Features	<ul style="list-style-type: none"> > New Stand, Wall mountable > AC/DC Adapter, AC Input: 100~240V, 50~60Hz > DC Output: 5V, 1A (P20/P20P/P20G) > Power consumption (PSU): 1.6~3.0W > Power consumption (PoE): 1.7~3.3W > Relative humidity: 10%~90% (No Condensing) - Storage temperature: -20~ 70°C - Operation temperature: 0~45°C > Dimension (W x D x H): 190mm x 188.5mm x 41mm
--------------------------	---

Package Content

Details	<p>Packing List:</p> <ul style="list-style-type: none"> - Flyingvoice P20/P20P/P20G IP Phone, Power adapter (optional for P20P/G) - Handset with handset cord, Ethernet cable, Stand - 1 handset, 1 handle cable, 1 Ethernet cable, 1 base stand - Quick Start Guide <p>Weight & Size:</p> <ul style="list-style-type: none"> > N.W/PCS(with handset and stand): 0.70kg/0.71kg/0.71kg, G.W/PCS: 0.99kg/0.94kg/0.94kg > Qty/CTN: 10 PCS, G.W/CTN: 10.80kg/10.30kg/10.30kg > Giftbox size: 270mm x 195mm x 78mm > Carton size: 410mm x 410mm x 290mm
----------------	--

Certification & Compatibility

Certificated by	
Compatible with	

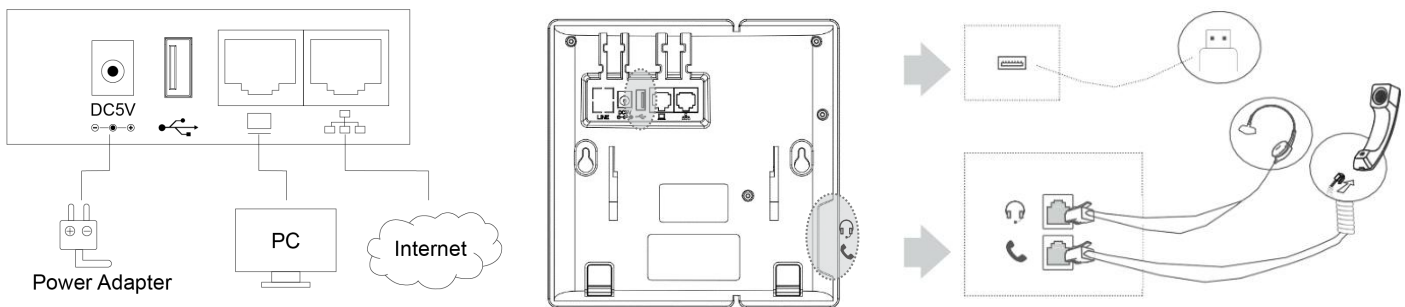

About Flyingvoice

Flyingvoice is a leading manufacturer of VoIP phones, VoIP adapters and VoIP routers, which are widely used throughout the world and highly praised by international carriers, ITSP, ISP and company users.

Driven by ongoing innovation of VoWLAN, Flyingvoice is committed to making easier VoIP products by enabling the enterprise network and united communication. Our people are continuously improving our products and expanding product applications tailored to clients' requirements, which make you collaborate securely, effectively and efficiently – anytime & anywhere.

Copyright

Copyright © Flyingvoice Network Technology Co., Ltd. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Flyingvoice Network Technology Co., Ltd.

Technical Support

Visit www.flyingvoice.com for product documents and FAQ, or contact Flyingvoice by email at support@flyingvoice.com. We'll get you the help you need.



Flyingvoice Network Technology Co., Ltd.

Website: www.flyingvoice.com

Add: 1801-1802, Building 1, Chongwen Park, Nanshan Zhiyuan, Nanshan District, Shenzhen, China

Copyright© Flyingvoice Network Technology Co., Ltd. All Rights Reserved